


FAMILIARIZE YOURSELF WITH THE PIECES

PARTS



HARDWARE

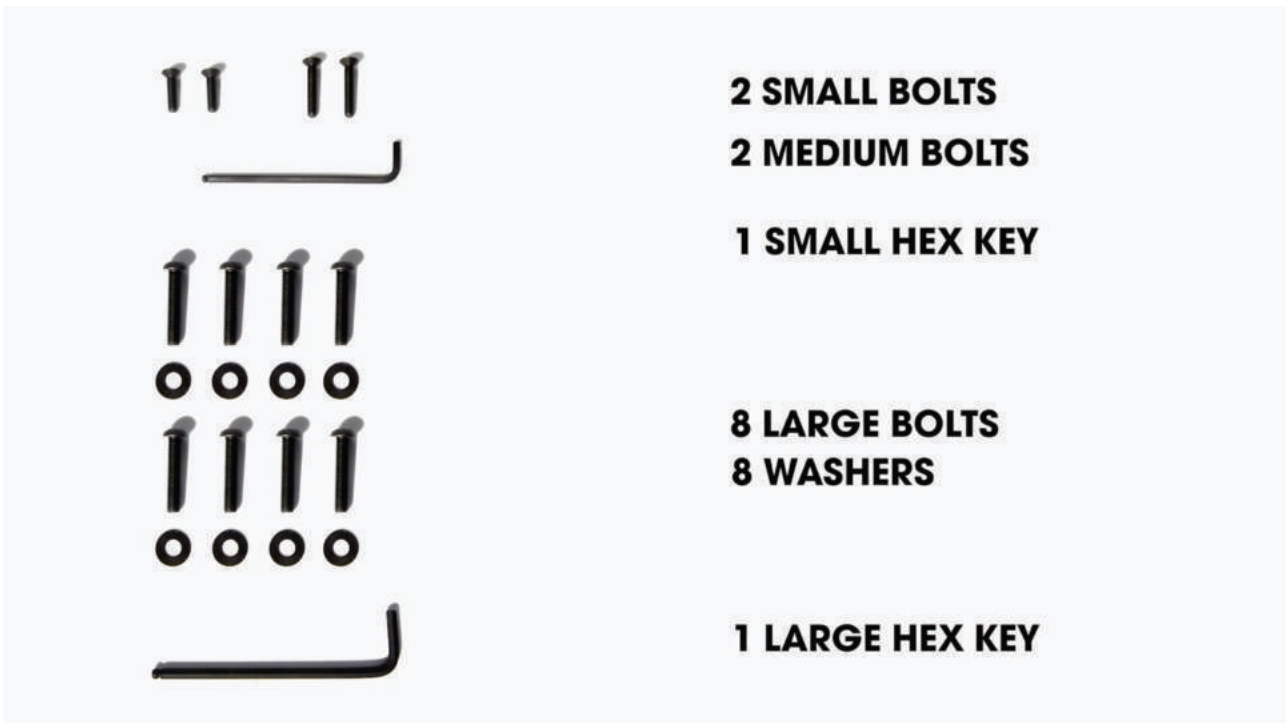

STEP 1: ATTACH THE BACK TO THE REAR LEG



For this step, you'll need the back, rear leg, the small and medium bolts, and the ball-head end of the hex key.

ALIGN THE SEAT WITH THE REAR LEG



Line up the corresponding holes on the back with those on the rear leg.



The small bolts go in the top holes, and the medium bolts go below. Tighten each one by hand before you finish with the hex key.

TIGHTEN THE BOLTS



Start with the ball-head end of your hex key for faster tightening.




Finish off each bolt with the other end of the hex key for greater torque.

STEP 2: ATTACH THE SEAT



To attach the seat you'll need four large bolts and their washers.

ALIGN THE SEAT WITH THE BASE

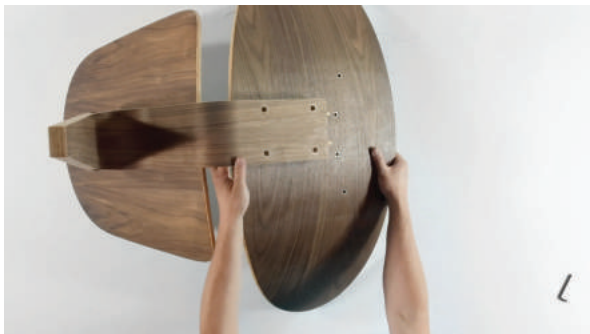


Place the seat on the base so that the four holes line up with those on the rear leg.




Place a washer in each of the four holes on the rear leg.

TIGHTEN THE BOLTS

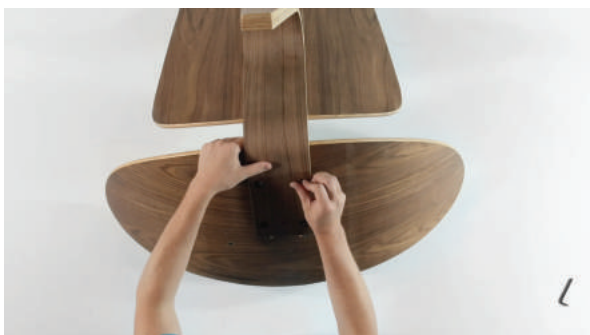

Place a bolt into each of the four holes. Make sure that each one is tightened by hand before moving on to the hex key.

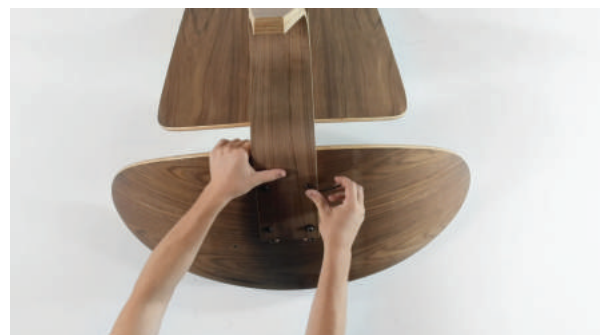

Finish tightening each bolt using the hex key.

STEP 3: ATTACH THE FRONT LEGS



To attach the front legs, you'll need the remaining four large bolts and washers.

ALIGN THE FRONT LEGS



Line up the holes on the bottom of the seat with those on the front legs.



Place a washer in each of the four holes. Tighten each one by hand before using the hex key to finish them off.

TIGHTEN THE BOLTS



Tighten each of the four bolts with the hex key until they are all secured.

THAT'S IT!

Party!